

Product Description

Bayonet probes are very robust temperature probes and are best suited for a fast switching between hot and cold, for use in vibration, high pressures or with oils or dirt.

Type 1: Bayonet mount is a fastening mechanism which consists of a cylindrical male side with two pins mounted radially, and a female receptor with two L-shaped slots which matches the pins and with spring which forces the parts to stick together.

Type 2: This is a fastening mechanism which consists of a cylindrical male adjustable along the spring with two pins mounted radially, and a receptor with a circular internal slot which matches the two pins. A spring forces the parts to stick together.

Application


- Plastic industry
- Rubber industry
- Engine building
- Process and Plant Engineering

Sensor Specification

- Number of Sensing Elements: 1
- Type of Thermocouple Sensing Junction: Ungrounded
- Thermocouple Tolerance: Class 1 - EN 60584
Class Special - ASTM E230
- Thermocouples are also available according to color coding DIN 43714 (withdrawn)
- RTD Tolerance: Class B - EN 60751

Technical Features

- Tip Diameter Tolerance: $-0,15 / +0,00$ mm
- Tip Length Tolerance: $\pm 0,30$ mm
- Stem Tip Angle: 120°
- Stem Material: AISI 304 (1.4301)
- Bayonet Adaptor Wrench Size: 19 mm
- Bayonet Adapter Style: Male Thread
- Spring Length: 250 mm
- Terminals: stripped leads or split leads
- Max Operating Temperature: depending on the selected cable type
- Polyolefin Heat-Shrink Sleeve: used only with "BRA" type cable
- Product Identification: Product part number and work order number are laser printed on tip sheath (below the spring)

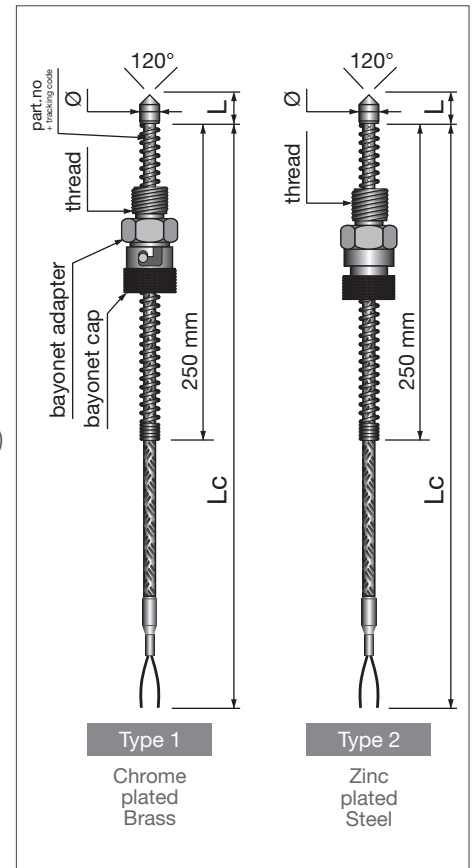

Product Configurator

5SY

TYPE OF SENSOR	
J	TC J (Fe-Co)
D	RTD - PT100 (2 wires)
F	RTD - PT100 (3 wires)
G	RTD - PT1000 (2 wires)
H	RTD - PT1000 (3 wires)

WIRE COLOUR CODE	
A	ASTM E230 (TC)
D	DIN 43714 (TC)
E	EN 60584 (TC)
R	EN 60751 (RTD)

STEM DIMENSION	
A	$\varnothing 6 \times 15$ mm
B	$\varnothing 6 \times 30$ mm
C	$\varnothing 8 \times 10$ mm

BAYONET ADAPTER THREAD (MALE)	
A	M12x1,5mm
B	1/4" GAS

BAYONET CAP/ADAPTER MATERIAL	
1	Chrome Plated Brass (Type 1)
2	Zinc Plated Steel (Type 2)

ORDER QUANTITY	
S	10 pcs
T	20 pcs
U	50 pcs
V	75 pcs
W	100 pcs
X	150 pcs
Y	200 pcs

TERMINALS	
S	Stripped Leads
P	Split Leads


CABLE LENGTH (Lc)	
A	500 mm
B	1000 mm
C	1500 mm
D	2000 mm
E	3000 mm

TYPE OF CABLE	
1	SIL (max 200°C)
3	BRA (RTD max 220°C / TC max 400°C)




Temperature sensor cables

The cables for temperature sensors are the heart of instruments that measure temperature because they are the ones that form the circuit that determines the difference in potential (thermocouple) or transmit the electrical signal (RTD), which then in both cases the measuring instruments convert into the temperature reading. The cables offered by Zoppas meet the requirements of DIN, IEC and ASTM standards. Although the temperature sensor is designed to run at very high temperature, sensor lead wires and terminations are rated for much lower temperatures. Care should be taken to make sure that the sensor lead end temperatures do not exceed their limitations.

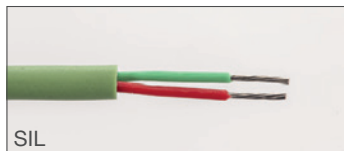


Cable Code	SIL
Description	Twisted MFA or Silicone insulated conductors covered with external silicone sheath
Features	Silicone rubber is a common choice for cable temperature sensors. Silicone rubber cables have excellent flexibility at both low temperatures and high temperatures. Furthermore, silicone rubber cables have accomplished electrical insulation properties.
Wire type	Solid or Stranded
Outside Shape	Rounded
External Jacket	Silicone Rubber (White for RTD sensors)
Conductor Insulation	MFA - Probe diameter ≤ 4 mm
Conductor Insulation	Silicone - Probe diameter > 4 mm
Temperature range	-40°C / +200°C
Type of conductors	J or K (Thermocouple) - Tinned Cu (RTD)

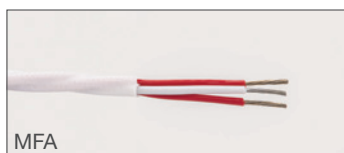

Cable Code	MFA
Description	Twisted MFA insulated conductors covered with external MFA sheath
Features	MFA cables are heat resistant, chemically inert, and have great dielectric properties. Resistant to oils, acids other adverse agents and fluids.
Wire type	Solid or Stranded
Outside Shape	Rounded
External Jacket	MFA (White for RTD sensors)
Conductor Insulation	MFA
Temperature range	-40°C / +220°C
Type of conductors	J or K (Thermocouple) - Tinned Cu (RTD)



Cable Code	BRA
Description	Twisted fiberglass insulated conductors, fiberglass filling and external tinned copper armouring
Features	The tinned copper braided cable provides abrasion resistance, easy installation into cable trays or ducts and resistance to high temperature (up to 400°C). Will not prevent ingress of fluids.
Wire type	Solid or Stranded
Outside Shape	Rounded
External Jacket	Tinned Copper
Conductor Insulation	Fiberglass
Temperature range	Thermocouple: 0°C / 400°C - RTD: 0°C / 220°C
Type of conductors	J or K (Thermocouple) - Tinned Cu (RTD)

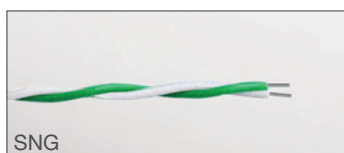

Cable Code	SNG
Description	Twisted cables made of solid or stranded insulated conductors
Features	PFA is similar to MFA, but has a slightly different chemical composition, allowing it to withstand even higher temperatures than MFA. Good mechanical strength and flexibility.
Wire type	Solid (TC) or Stranded (RTD)
Outside Shape	Rounded
Conductor Insulation	PFA
Temperature range	TC -65°C / +260°C - RTD -65°C / +200°C
Type of conductors	J or K (Thermocouple) - Cu (RTD)

Standard color coding

Color coding of the thermocouple cables according to DIN, IEC and ASTM standards.

Color coding of RTD cables is also represented here below.

Standard colors	DIN 43714	IEC 584-3	ASTM E230	RTD TYPE
Thermo couple type				
J				
K				

Terminals

Our temperature sensors are available with two types of terminals: stripped leads or split leads terminals are made of tin plated electrolytic copper. Working Temperature Range: -20 / +115°C. Flexible temperature sensors available only with Stripped Leads.

